


MICROCIRCUIT ILX3221N INTERFACE TRANSCEIVER OF THE SERIAL DATA OF THE STANDARD RS -232

(compatible to MAX3221 (MAXIM USA))


Microcircuits ILX3221 is interface transceiver of serial data under RS - 232 standard with single power supply source & bipolar output voltage of transmitter, forming by build-in voltage multiplier on 4 external capacities, 0.1 μF. ILX3221 correspond to EIA/TIA-232E, V.28 standard and is purposed for application in modern high efficient calculating systems with the wide range of supply voltage, fast-operating electronic devices with high level of fidelity of information exchange among distant devices.



**N SUFFIX
DIP**

IC marking in package
ILX3221N Plastic DIP
T_A= from -40 to 85 °C

Pinning

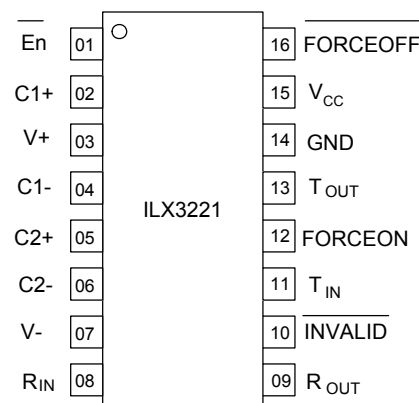

Functions and structure:

- Microcircuit contains 1 transmitter and 1 receivers of the serial data of the standard RS-232.
- AutoShutdown function provide low power consumption. Supply
- The microcircuit supply voltage range is from 3.0 to 5.5 V.
- The microcircuits is available in 16-pin DIP-package (MS-001BB).

Truth table


Mode	Inputs					Outputs	
	FORCEON	FORCEOFF	En	R _{IN}	T _{IN}	R _{OUT}	T _{OUT}
Low power consumption (without Autoshutdown function)	X	L	L	L	X	H	Z
	X	L	L	H	X	L	Z
	X	L	H	X	X	Z	Z
Data transfer (without Autoshutdown function)	H	H	L	L	L	H	H
	H	H	L	L	H	H	L
	H	H	L	H	L	L	H
	H	H	H	X	L	Z	H
	H	H	H	X	H	Z	L
Data transfer (with Autoshutdown function)	L	H	L	L	L	H	H
	L	H	L	L	H	H	L
	L	H	L	H	L	L	H
	L	H	H	X	H	Z	L
	L	H	H	X	L	Z	H
Low power consumption (with Autoshutdown function)	L	H	L	L _{INVL}	X	H	Z
	L	H	H	L _{INVL}	X	Z	Z

Note - H – high level;
 - L – low level;
 - X – any level (H or L);
 - L_{INVL} – low level signal not less than -0.3 V & not more than 0.3 V with duration not less that t_{PHLINV};
 - Z – third state of output

Truth table for $\overline{\text{INVALID}}$ pin

R_{IN}	$\overline{\text{INVALID}}$
L	H
H	H
L_{INVL}	L

Functional diagram

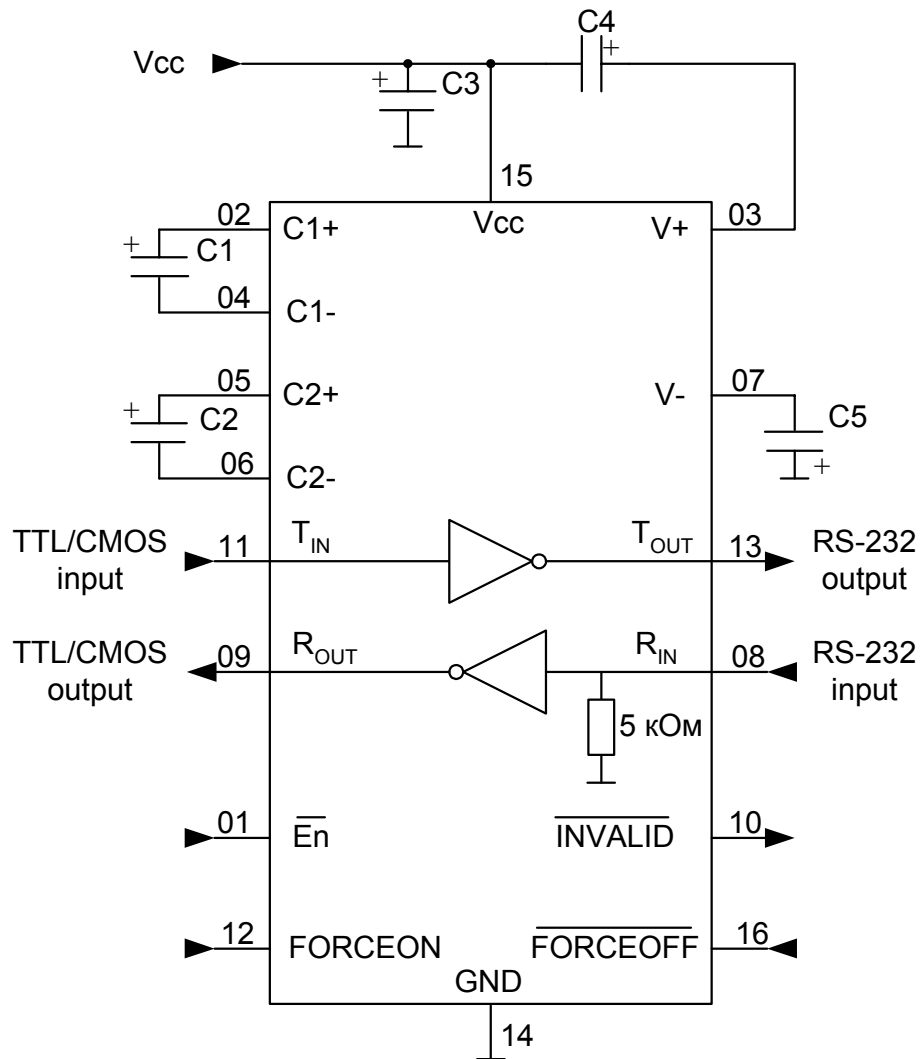

C1 – capacitor $0.1 \mu\text{F} \pm 10 \%$ for $U_{\text{CC}} = 3.3 \text{ V} \pm 10\%$ ($0.047 \mu\text{F} \pm 10 \%$ for $U_{\text{CC}} = 5.0 \text{ V} \pm 10\%$)

C2, C4, C5– capacitors $0.1 \mu\text{F} \pm 10 \%$ for $U_{\text{CC}} = 3.3 \text{ V} \pm 10\%$ ($0.33 \mu\text{F} \pm 10 \%$ for $U_{\text{CC}} = 5.0 \text{ V} \pm 10\%$)

C3 – capacitor $0.1 \mu\text{F} \pm 10 \%$

Pin description table

Pin number	Symbol	Pin description
01	$\overline{E_n}$	Receiver enable control input
02	C1+	Positive terminal of the voltage multiplier charge-pump capacitor
03	V+	Positive voltage multiplier output
04	C1-	Negative terminal of the voltage multiplier charge-pump capacitor
05	C2+	Positive terminal of the voltage multiplier charge-pump capacitor
06	C2-	Negative terminal of the voltage multiplier charge-pump capacitor
07	V-	Negative voltage multiplier output
08	R _{IN}	RS-232 Receiver data inputs
09	R _{OUT}	TTL/CMOS Receiver data output
10	$\overline{INVALID}$	Output of the valid signal detector. Indicates if a valid RS-232 level is present on receiver inputs logic "1".
11	T _{IN}	TTL/CMOS transmitter data input
12	FORCEON	Autoshutdown mode control input (enable active operation of the IC)
13	T _{OUT}	RS-232 transmitter data outputs
14	GND	Common pin
15	V _{cc}	Supply voltage
16	$\overline{FORCEOFF}$	Autoshutdown mode control input (switch the IC to low power consumption mode)

Maximum Ratings & Recommended Operating Conditions

Parameter, unit	Symbol	Recommended operating conditions		Maximum rate	
		min	max	min	max
Supply voltage, V	U _{CC}	3.0	5.5	-0.3	6.0
Voltage applied to transmitter output, B	U _{OT}	-	-	-13,2	13.2
Multiplier positive output voltage, V	U ₊	5.0	-	-0,3	7.0
Multiplier negative output voltage, V	U ₋	-5.0	-	-7,0	0.3
Receiver input voltage, V	U _{IR}	-25	25	-25	25
Receiver output voltage, V	U _{OR}	-	-	-0,3	U _{cc} +0.3
Transmitter low level input voltage, V	U _{IL}	0	0.8	-0,3	-
Transmitter high level input voltage, V	U _{IH}	2.0 (U _{cc} =3.3 V)	U _{cc}	-	6
		2.4 (U _{cc} =5.0 V)			
Multiplier outputs voltages difference, V	U _{+,+ U₋}	-	-	-	13
Receiver low level threshold input voltage, V	U _{ITL}	0.6 (U _{cc} =3.3 V)	-	-	-
		0.8 (U _{cc} =5.0 V)			
Receiver high level threshold input voltage, V	U _{ITH}	-	2.4	-	-
Receiver threshold input voltage corresponding to low level on $\overline{INVALID}$ pin , V	U _{INVL}	-0.3	0.3	-	-
Receiver threshold input voltage corresponding to high level on $\overline{INVALID}$ pin , V	U _{INVH}	-2.7	2.7	-	-

Electric parameters

Parameter, unit	Symbol	Norm		Mode	T _A , °C	
		Min	Max			
AutoShutdown mode supply current, μA	I _{CC1}	-	10	U _{CC} = 3.3; 5.0 V; FORCEON is connected to GND;	25±10	
			14	FORCEOFF is connected to V _{CC} R _{IN} not connected	-40; 85	
Low power consumption mode supply current, μA	I _{CC2}	-	10	U _{CC} = 3.3; 5.0 V; FORCEOFF is connected to	25±10	
			14	GND R _{IN} connected to GND	-40; 85	
AutoShutdown Disabled supply current, μA	I _{CC3}	-	1.0	U _{CC} = 3.3 V; 5.0 V; FORCEON &	25±10	
			1.4	FORCEOFF is connected to V _{CC} without load	-40; 85	
Low level input leakage current (for control inputs), μA	I _{ILL}	-	-0.5	U _{CC} = 5.5 V	25±10	
			-1.0		-40; 85	
High level input leakage current (for control inputs), μA	I _{ILH}	-	0.5	U _{CC} = 5.5 V	25±10	
			1.0		-40; 85	
Receiver						
Low level output voltage, V	U _{OLR}	-	0.3	U _{CC} = 3.3V ±10%; U _{ITL} = 2.4V; I _{OL} = 1.6 mA; U _{INVH} = 2.7 V	25±10	
			0.4		-40; 85	
			0.3		U _{CC} = 5.0V ±10%; U _{ITL} = 2.4V;	25±10
			0.4		I _{OL} = 1.6 mA; U _{INVH} = 2.7 V	-40; 85
High level output voltage, V	U _{OHR1}	-	2.5	U _{CC} = 3.3V ±10%; U _{ITL} = 0.6 V; I _{OH} = -1.0 mA; U _{INVH} = -2.7 V	25±10	
			2.37		-40; 85	
	U _{OHR2}		4.0		U _{CC} = 5.0V ±10%; U _{ITL} = 0.8 V;	25±10
			3.9		I _{OH} = -1.0 mA; U _{INVH} = -2.7 V	-40; 85
Receiver hysteresis, V	U _{hR}	0.2	1.0	U _{CC} = 3.3 V ± 10%; 5.0 V ± 10%	25±10	
Low level output voltage, V (for INVALID pin)	U _{OLINV}	-	0.3	U _{CC} = 3.3V ±10 %; I _{OL} = 1.6 mA; U _{INVL} = 0.3 V or -0.3 V; FORCEON is connected to GND; FORCEOFF is connected to V _{CC}	25±10	
			0.4		-40; 85	
			0.3		U _{CC} = 5.0V ±10 %; I _{OL} = 1.6 mA;	25±10
			0.4		U _{INVL} = 0.3 V or -0.3 V; FORCEON is connected to GND; FORCEOFF is connected to V _{CC}	-40; 85
High level output voltage, V (for INVALID pin)	U _{OHINV1}	-	2.5	U _{CC} = 3.3 V ±10 %; I _{OH} = -1.0 mA; U _{INVH} = 2.7 V or -2.7 V; FORCEON is connected to GND; FORCEOFF is connected to V _{CC}	25±10	
			2.37		-40; 85	
	U _{OHINV2}		4.0		U _{CC} = 5.0V ±10%; I _{OH} = -1.0 mA;	25±10
			3.9		U _{INVH} = 2.7 V or -2.7 V; FORCEON is connected to GND; FORCEOFF is connected to V _{CC}	-40; 85


Electric parameters

Parameter, unit	Symbol	Norm		Mode	T _A , °C	
		Min	Max			
Receiver						
Low level output current for OFF-state, μA	I _{OZLR}	-	-2.5 -10	Receiver output is disabled; U _{CC} =5.5 V; U _O = 0 V	25±10 -40; 85	
High level output current for "OFF"-state, μA	I _{OZHR}	-	2.5 10	Receiver output is disabled; U _{CC} =5.5 V; U _O = 5.5 V	25±10 -40; 85	
Input resistance, kOhm	R _I	3	7	-	25±10	
OFF-ON switching propagation delay, ns	t _{PHLR} , t _{PLHR}	-	500	U _{CC} = 5.0V ±10 %; C _L = 150 pF;	25±10 -40; 85	
Propagation delays difference, ns	t _{SKD}	-	200	U _{IL} = 0 V; U _{IH} = 3.0 V; t _{LH} = t _{HL} ≤ 10 ns		
Propagation delay of transition from high (low) level state to OFF-state, ns	t _{PLZR} (t _{PHZR})	-	400	U _{CC} = 5.0V ±10 %; U _{IL} = 0 V; U _{IH} = 3.0 V;		
Propagation delay of transition from OFF-state to high (low) level state, ns	t _{PZLR} (t _{PZHR})	-	400	t _{LH} = t _{HL} ≤ 10 ns; C _L = 150 pF; R _L = 1 kOhm		
Propagation delay of transition <u>INVALID</u> pin to low level state, μs	t _{PHLINV}	-	80	U _{CC} = 5.0V ±10 %; U _{IL} = 0; -3.0 V; U _{IH} = 3.0; 0 V;		
Propagation delay of transition <u>INVALID</u> pin to high level state, μs	t _{PLHINV}	-	2.9	t _{LH} = t _{HL} ≤ 10 ns; C _L = 15 pF		
Transmitter						
Low level output voltage, V	U _{OLT1}	-	-5.07 -5.0	U _{CC} =3.3V ±10%; U _{IH} = 2.0V; R _L = 3 kOhm		25±10 -40; 85
	U _{OLT2}	-	-5.07 -5.0	U _{CC} =5.0V ±10%; U _{IH} = 2.4V; R _L = 3 kOhm		25±10 -40; 85
High level output voltage, V	U _{OHT}	5.07	-	U _{CC} =3.3V ±10%; U _{IL} = 0.8V; R _L = kOhm	25±10 -40; 85	
		5.0	-	U _{CC} =5.0V ±10%; U _{IL} = 0.8V; R _L = kOhm	25±10 -40; 85	
		5.0	-	U _{CC} =5.0V ±10%; U _{IL} = 0.8V; R _L = kOhm	25±10 -40; 85	
Transmitter hysteresis, V	U _{HT}	0.1	1,0	U _{CC} = 3.3 V ± 10%; 5.0 V ± 10%	25±10	
Output resistance, Ohm	R _O	350	-	U _{CC} = U _{V+} * = U _{V-} * = 0 V; U _O = ±2 V	25±10 -40; 85	
		300	-			
Short circuit current, mA	I _{OS}	-	53	U _{CC} = 3.63 V;	25±10	
			60	U _{IH} = 2.0V	-40; 85	
			-53	U _{CC} = 3.63 V;	25±10	
			-60	U _{IH} = 2.0V	-40; 85	
			53	U _{CC} = 5.5 V;	25±10	
			60	U _{IH} = 2.0V	-40; 85	
			-53	U _{CC} = 5.5 V;	25±10	
			-60	U _{IH} = 2.0V	-40; 85	
Low level output current for OFF-state, uA	I _{OZLT}	-	-10 -25	U _{CC} = 0; 3.3; 5.5 V; U _O = -12 V; transmitter output is disabled	25±10 -40; 85	


Electric parameters

Parameter, unit	Symbol	Norm		Mode	T _A , °C
		Min	Max		
Transmitter					
High level output current for OFF-state, μA	I _{OZHT}	-	10 25	U _{CC} = 0; 3.3; 5.5 V U _O = 12 V; transmitter output is disabled	25±10 -40; 85
Maximum Data Rate, Kbit/s	ST	250	-	R _L = 3 kOhm; C _L = 1000 pF	-40÷85
Transition-Region Slew Rate, V/us	SR	6	30	U _{CC} = 3.3 V; R _L = (3-7) kOhm; U _{OT} is changing from +3 to -3 V or from -3 to +3 V; C _L = (150-1000) pF	25±10
Propagation delays difference, ns	t _{SKEW}	-	300	U _{CC} = 5.0V ±10 %; U _{IL} = 0 V; U _{IH} = 3.0 V; t _{LH} = t _{HL} ≤ 10 ns; R _L =3 kOhm; C _L =1000 pF	
Transmitter output enable time, μS	t _{WU}	-	120	U _{CC} = 5.0V ±10 %; U _{IL} = 0 V; U _{IH} = 3.0 V; U _{IL} = -3.0 V; U _{IH} = 0 V	


* U_{V+}, U_{V-} - voltages applied to pins 03 , 07.
 Note – Electric parameters is indicated for C1=0.047 uF, C2-C4 = 0.33 μF & U_{CC} = 5.0 V±10 %
 (or C1-C4 = 0.1 μF & U_{CC} = 3.3 V±10 %)

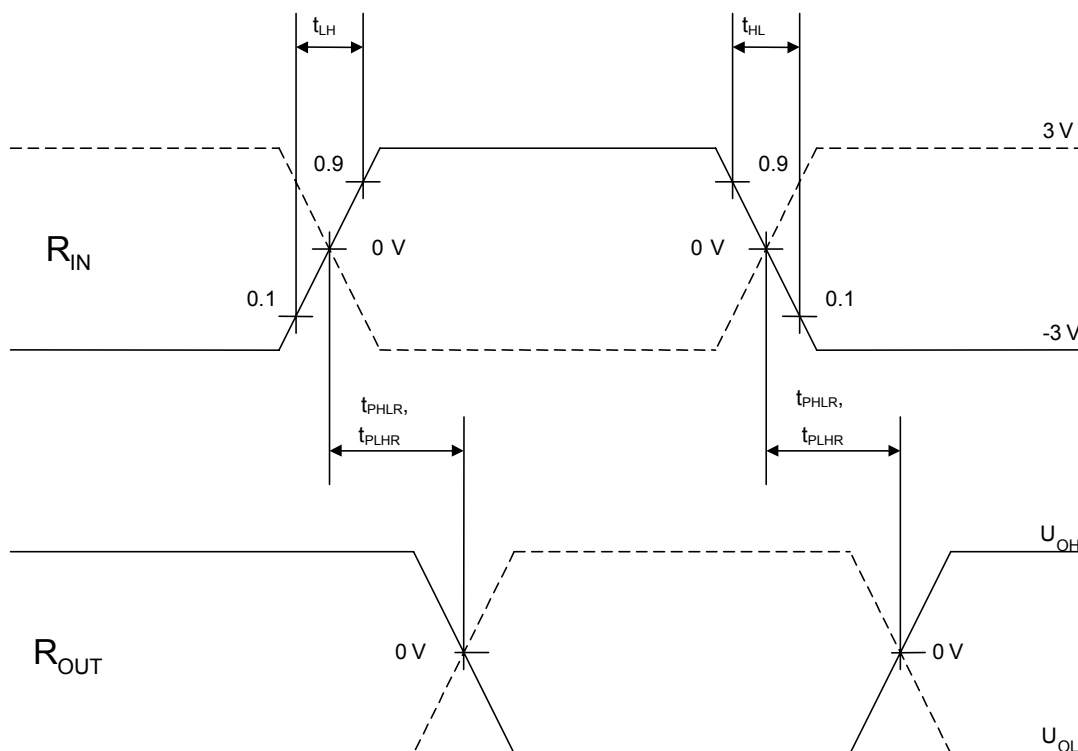


Receiver output & input signals time diagram

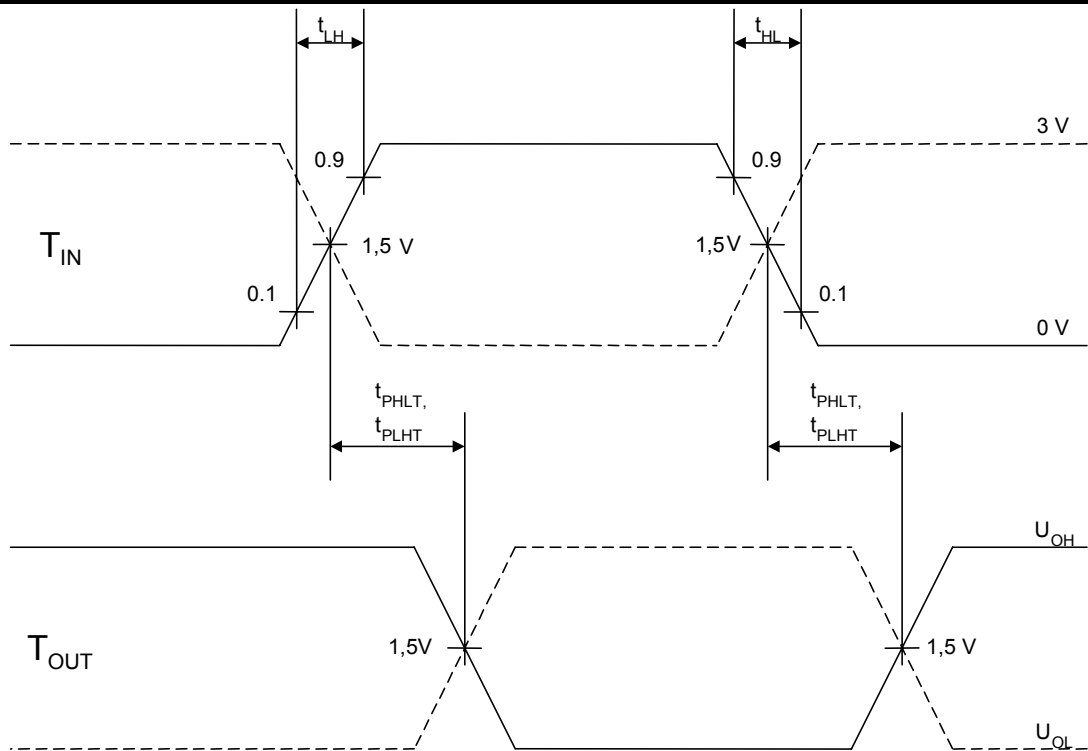


Transmitter output & input signals time diagram

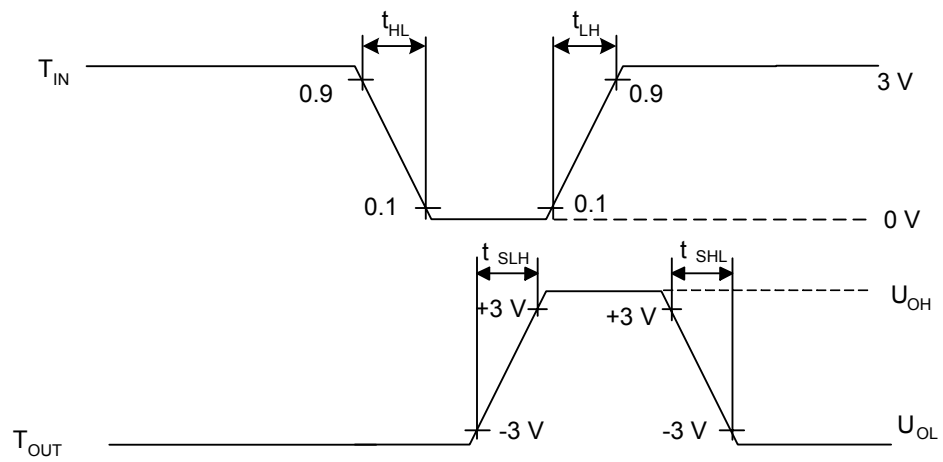

Transmitter output & input signals time diagram

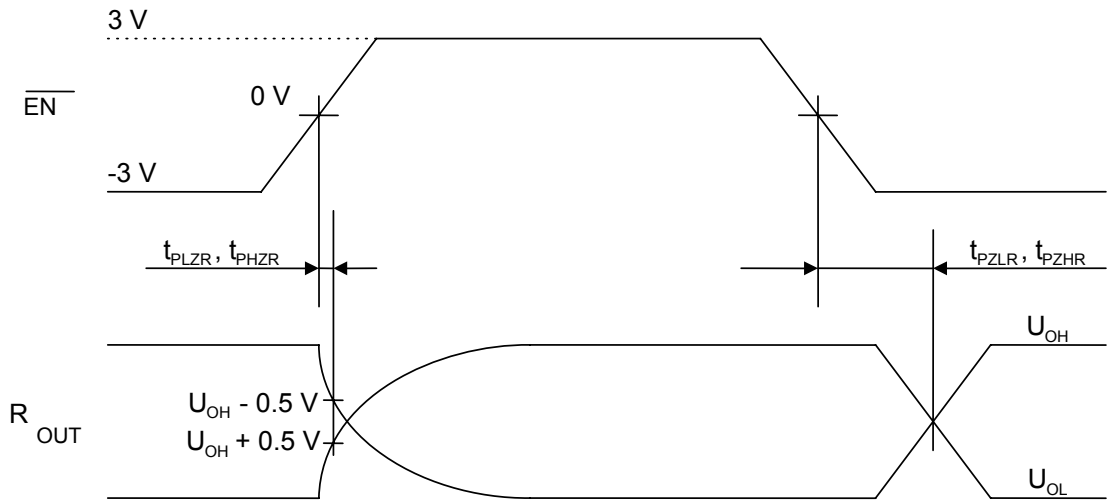


Receiver output & input signals time diagram

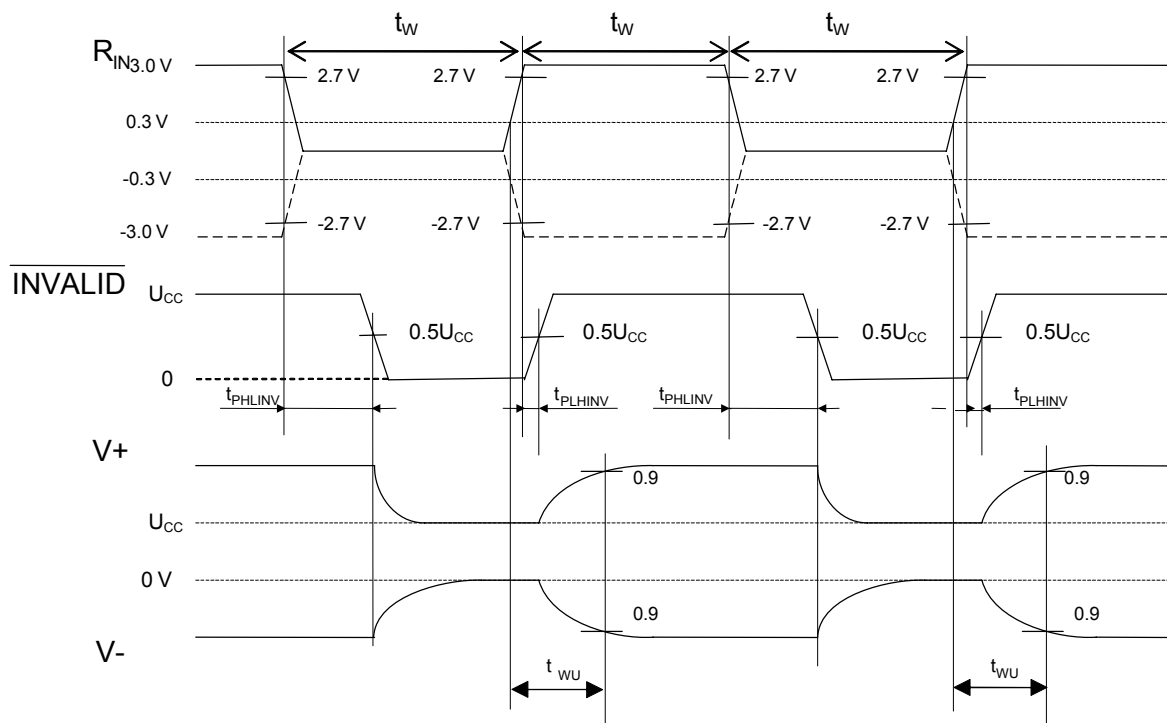

t_{PHLINV}, t_{PLHINV}, t_{WU} dynamic parameters timing diagram

Package Dimensions
DIP-package MS-001BB

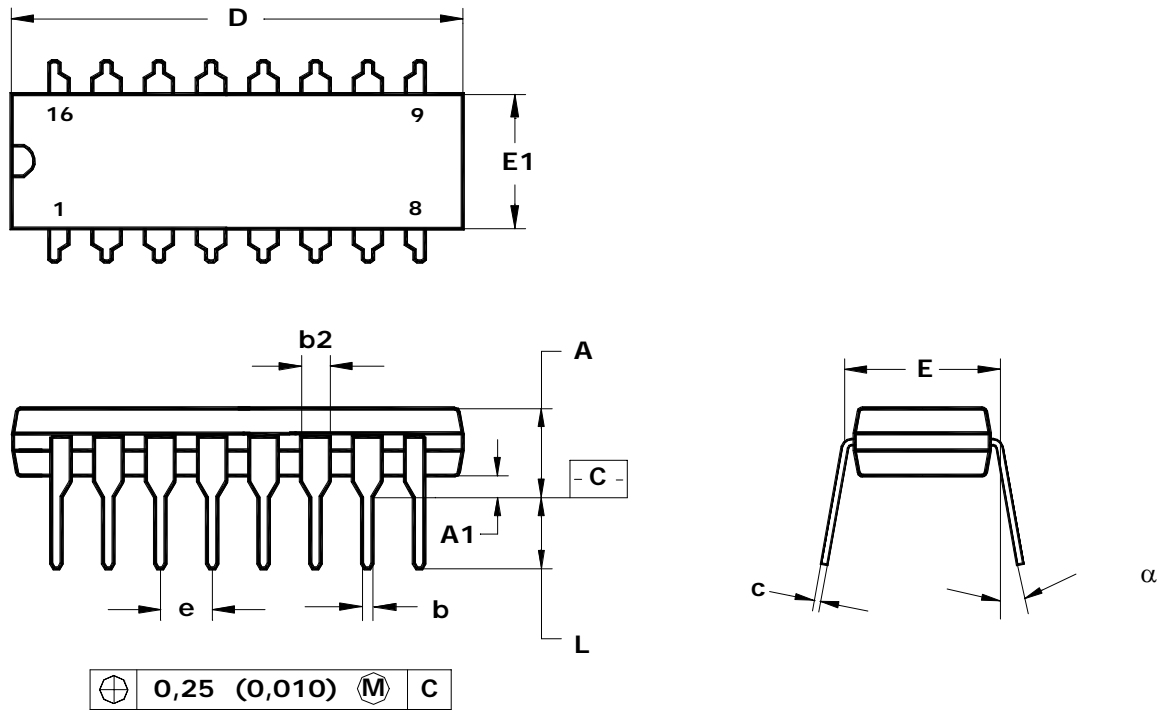

Note - Dimensions D, E1 do not include the fin value, which should not exceed 0.25 mm (0.010) per side.

	D	E1	A	b	b2	e	α	L	E	c	A1
	mm										
min	18.93	6.07	—	0.36	1.14	2.54	0°	2.93	7.62	0.20	0.38
max	19.43	7.11	5.33	0.56	1.78		15°	3.81	8.26	0.36	—
	Inches										
min	0.355	0.240	—	0.014	0.045	0.1	0°	0.115	0.300	0.008	0.015
max	0.400	0.280	0.210	0.022	0.070		15°	0.150	0.325	0.014	—