

## IN74VHC126D

### QUAD 3-STATE NONINVERTING BUFFERS


IN74VHC126D is high-speed logic IC made by CMOS technology and designed for use in high-performance calculating systems with a wide supply voltage range.

As for operation speed, IN74VHC126D can be compared with equivalent bipolar ICs based on Schottky TTL and two times surpasses ICs of IN74HC series.

IN74VHC126D tolerates operation under conditions when voltage on input is exceeded up to 7V without affecting characteristics and IC reliability. This possibility allows to use IN74VHC126D in radio-electronic devices for interfacing with supply voltages 5V and 3V, eliminate IC failure under supply voltage source emergency outage.

Use of output edge shaping block in the microcircuit allows to reduce noise amplitude of noises when switching outputs into the same state simultaneously.

Input and output levels of IN74VHC126D are compatible with CMOS levels



#### Features:

- Supply voltage range 2.0 to 5.5 V.
- Output current 8 mA.
- Low consumption current: 0.2 mA (typical value) at  $T_a = 25\text{ }^\circ\text{C}$ .
- Latchup current not less than 300 mA at  $T_a = 85\text{ }^\circ\text{C}$ .
- Tolerable value of static potential not less than 2000 V as per human body model (HBM) and not less than 200 V as per machine model (MM).
- Ambient operation temperature minus 40 to plus 85  $^\circ\text{C}$ .
- Balanced signal propagation delay.
- Ensures voltage exceeding mode on input
- Low noise level at the simultaneous switching of outputs in the same state:  $V_{OLP} = 0.8\text{ V (max)}$ .
- For pins and functions, compatible with IN74HC126.


# IN74VHC126D

**IN74VHC126D truth table**

Input		Output
G	A	Y
L	X	Z
H	L	L
H	H	H

**Note** – H - high voltage level;  
 L – low voltage level;  
 X - any voltage level (low or high);  
 Z - output in the third

**Pinout**

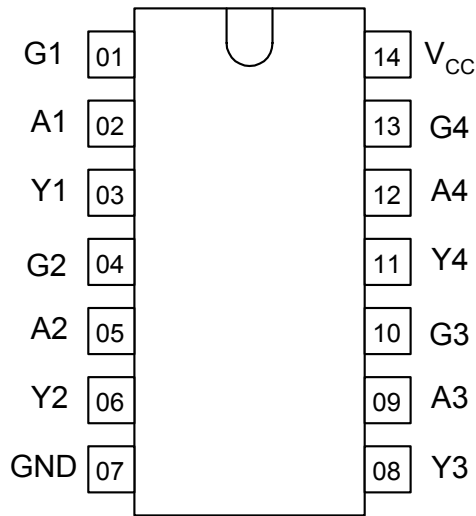

**Pins description in IN74VHC126D**

Pin No.	Symbol	Description
01	G1	Input ENABLE OUTPUT
02	A1	Input
03	Y1	Output
04	G2	Input ENABLE OUTPUT
05	A2	Input
06	Y2	Output
07	GND	Common output
08	Y3	Output
09	A3	Input
10	G3	Input ENABLE OUTPUT
11	Y4	Output
12	A4	Input
13	G4	Input ENABLE OUTPUT
14	VCC	Supply output from voltage source

## IN74VHC126D

### Absolute maximum conditions\*

Parameter, unit	Symbol	Value	
		min	max
Supply voltage, V	$V_{CC}$	-0.5	7.0
Input voltage, V	$V_{in}$	-0.5	7.0
Output voltage, V	$V_{out}$	-0.5	$V_{CC}+0.5V$
Input diode current, mA	$I_{ik}$	–	-20
Current of common output and supply output, mA	$I_{cc}$	–	$\pm 50$
Output current, mA	$I_{out}$	–	$\pm 25$
Output diode current, mA	$I_{ok}$	–	$\pm 20$
Dissipated power, mW	$P_d$	–	180

\*Under absolute maximum conditions operation of microcircuit is not guaranteed. Operation is guaranteed under maximum conditions

### Maximum conditions

Parameter, unit	Symbol	Value	
		min	max
Supply voltage, V	$V_{CC}$	2.0	5.5
Input voltage, V	$V_{in}$	0	$V_{CC}$
Output voltage, V	$V_{out}$	0	$V_{CC}$
Output current, mA	$I_{out}$	–	$\pm 8.0$
Input rise and fall time, ns/V at $V_{CC} = (3.3 \pm 0.3) V$ at $V_{CC} = (5.0 \pm 0.5) V$	$t_{LH}, t_{HL}$	0 0	100 20

## IN74VHC126D

### DC electrical characteristics

Symbol	Parameter	Test conditions	V <sub>CC</sub> , V	Value				Unit
				25 °C		-40 to 85 °C		
				min	max	min	max	
V <sub>IH</sub>	High input voltage	-	2.0	1.5	-	1.5	-	V
			3.0-5.5	0.7V <sub>CC</sub>	-	0.7V <sub>CC</sub>	-	
V <sub>IL</sub>	Low input voltage	-	2.0	-	0.5	-	0.5	
			3.0-5.5	-	0.3V <sub>CC</sub>	-	0.3V <sub>CC</sub>	
V <sub>OH</sub>	High output voltage	V <sub>I</sub> = V <sub>IH</sub> or V <sub>IL</sub> I <sub>O</sub> = -50 mA	2.0	1.92	-	1.9	-	
			3.0	2.92	-	2.9	-	
			4.5	4.42	-	4.4	-	
			5.5	5.52	-	5.4	-	
		3.0	2.58	-	2.48	-	V <sub>I</sub> = V <sub>IH</sub> or V <sub>IL</sub> ; I <sub>O</sub> = -4 mA	
		4.5	3.94	-	3.80	-		
V <sub>OL</sub>	Low output voltage	V <sub>I</sub> = V <sub>IH</sub> or V <sub>IL</sub> I <sub>O</sub> = 50 mA	2.0	-	0.09	-	0.1	
			3.0	-	0.09	-	0.1	
			4.5	-	0.09	-	0.1	
			5.5	-	0.09	-	0.1	
		3.0	-	0.36	-	0.44	V <sub>I</sub> = V <sub>IH</sub> or V <sub>IL</sub> I <sub>O</sub> = 4 mA	
		4.5	-	0.36	-	0.44		
I <sub>OZ</sub>	Output current in "off" state	V <sub>I</sub> = V <sub>IH</sub> or V <sub>IL</sub> V <sub>O</sub> = V <sub>CC</sub> or 0V	5.5	-	±0.25	-	±2.5	mA
I <sub>I</sub>	Input current	V <sub>I</sub> = 5.5V or 0V	0 - 5.5	-	±0.1	-	±1.0	
I <sub>CC</sub>	Consumption current	V <sub>I</sub> = V <sub>CC</sub> or 0V	5.5	-	4.0	-	40.0	

## IN74VHC126D

### AC electrical characteristics ( $t_{LH} = t_{HL} = 3.0$ ns)

Symbol	Parameter	Test conditions	$V_{CC}, V$	$C_L, pF$	Value				Unit
					25 °C		-40 to 85 °C		
					min	max	min	max	
$t_{PHL}, t_{PLH}$	Propagation delay time when switching "on", "off"	Figure 1	$3.3 \pm 0.3$	15	-	8.0	-	9.5	ns
				50		11.5		13.0	
			$5.0 \pm 0.5$	15		5.5		6.5	
				50		7.5		8.5	
$t_{PHZ}, t_{PLZ}$	Propagation delay time under transition from high, low level into "off" state	Figure 2	$3.3 \pm 0.3$	50	-	13.2	-	15.0	
			$5.0 \pm 0.5$	50	-	8.8	-	10.0	
$t_{PZH}, t_{PZL}$	Propagation delay time under transition from «off» state into high, low level	Figure 2	$3.3 \pm 0.3$	15	-	8.0	-	9.5	
				50	-	11.5	-	13.0	
			$5.0 \pm 0.5$	15	-	5.1	-	6.0	
				50	-	7.1	-	8.0	
$t_{OSLH}, t_{OSHL}$	Propagation delays difference between outputs	-	$3.3 \pm 0.3$	50	-	1.5	-	1.5	
			$5.5 \pm 0.5$	50	-	1.0	-	1.0	

### Capacitance characteristics

Symbol	Parameter	Test conditions	$V_{CC}, V$	Value		Unit
				25 °C		
				min	max	
$C_I$	Input capacity	-	5.0		10	pF
$C_O$	Output capacity	-	5.0		12	pF
$C_{PD}$	Dynamic capacity	$V_I = 0 V$ or $V_{CC}$	5.0		30	pF

### Noise characteristics ( $C_L = 50$ pF)

Symbol	Parameter	$V_{CC}, V$	Value		Unit
			min	max	
$V_{OLP}$	Positive noise of low output voltage	5.0	-	0.8	V
$V_{OLV}$	Negative noise of low output voltage	5.0	-0.8	-	
$V_{IHD}$	Input dynamic high voltage	5.0	3.5	-	
$V_{ILD}$	Input dynamic low voltage	5.0	-	1.5	

# IN74VHC126D

## - Time diagram of input and output pulses

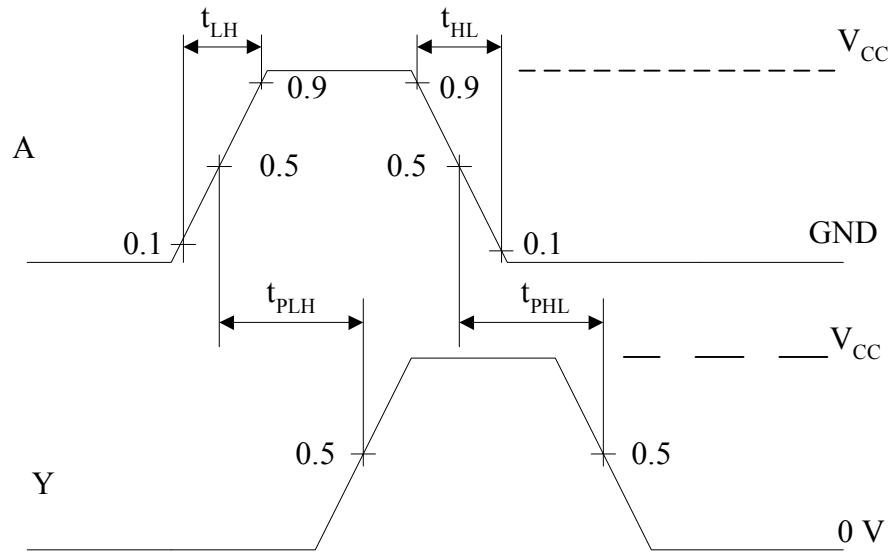


Fig. 1


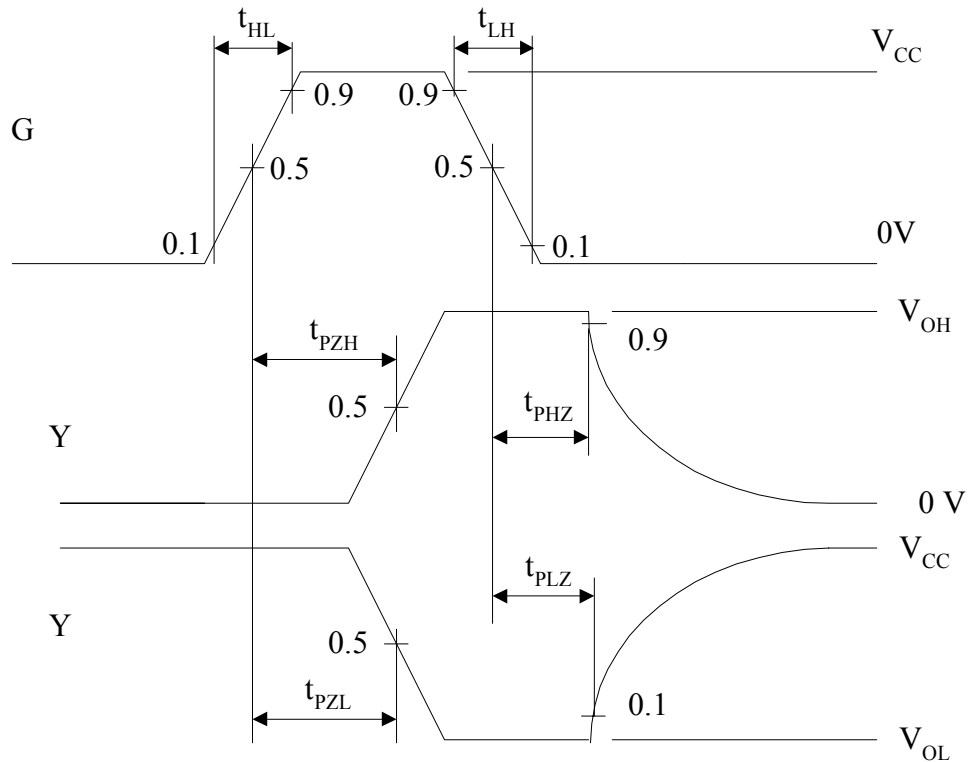


Fig. 2

# IN74VHC126D

## MS-012AB Package dimensions

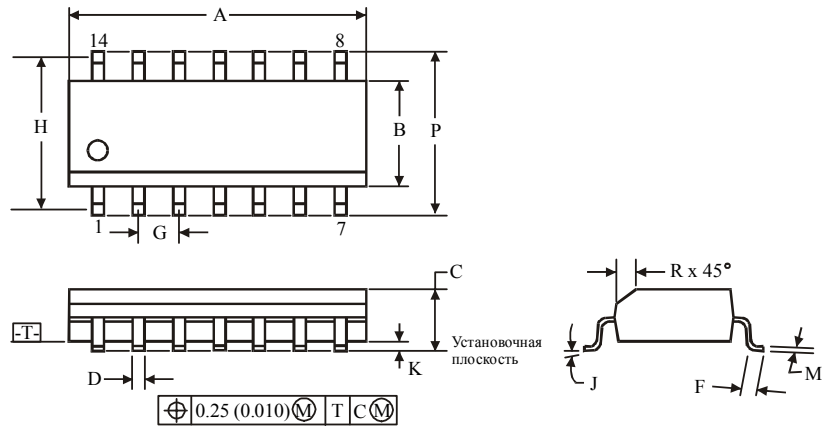

	Dimensions, mm	
	min	max
<b>A</b>	8.55	8.75
<b>B</b>	3.80	4.00
<b>C</b>	1.35	1.75
<b>D</b>	0.33	0.51
<b>F</b>	0.40	1.27
<b>G</b>	1.27	
<b>H</b>	5.72	
<b>J</b>	0°	8°
<b>K</b>	0.10	0.25
<b>M</b>	0.19	0.25
<b>P</b>	5.80	6.20
<b>R</b>	0.25	0.50